F900 SERIES







Short Form Specification

Unit to be Falcon F900 Series gas range having $4 \times 9.5 \text{kW}$ gas burners and a 2/1 GN gas oven below with 5 shelf positions. Unit to be supplied upon adjustable feet. Unit will have four individual cast iron pan supports.

High performance burners with removable cap for ease of cleaning to have flame failure device as standard to stop gas supply to in the event of the burners being extinguished in error. Each burner is to be lit by means of a pilot which will have a protection hood – to prevent clogging. The burners will be held within a deep drawn pressed well to contain spillages and allowing easy cleaning.

The hob will be constructed from 2mm 304 grade stainless steel. Hobs will be laser cut with right-angled edges to allow joining of units with no gaps between hobs. Exterior panels are Scotch Brite finish stainless steel. Control knobs to be marked showing gas positions and to have a bezel behind each knob to prevent water ingress.

Oven to be 2/1 GN compatible on runners.

Unit will be for use with natural, propane or butane gas and be supplied with conversion kit.

Key Features

- 4 x high performance 9.5kW burners
- Individually protected burner pilots
- Burners fitted with flame failure device as standard
- Individual cast iron pan supports
- Sealed burner wells to contain any spillage
- Supplied upon adjustable stainless steel feet
- Fully-pressed oven door seal better heat retention
- 2/1 GN oven with side-mounted runners
- 5 shelf positions, 2 shelves supplied
- 80 280°C oven temperature range
- 2mm thick 304 grade stainless steel hob
- Laser cut hob allows edge to edge joining of units
- Stainless steel external panels with Scotch Brite finish
- For use with natural, propane and butane gas.
 Conversion kit supplied with each unit
- Dynamic Link System Compatible



Integrated linking system allows quick and easy installation to create a seamless, continuous cookline. Patent pending, application no. GB 1511389.7


Optional Accessories

- Front hob rail
- Side cover panel
- Kick plate
- Castors



G9184 Four Burner Gas Range

Model Dimensions (mm)

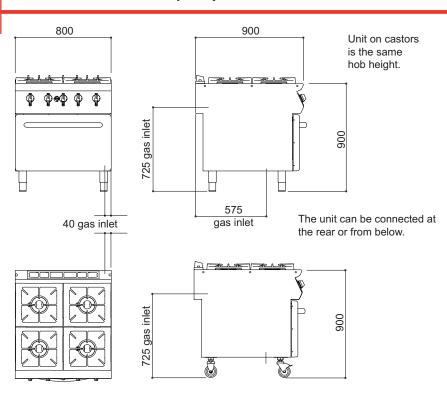

Specification Details

| | Natural Gas | Propane Gas | Butane Gas |
|-------------------------------------|------------------------------|-------------|-------------------|
| Total rating (kW - Nett) | 45.5 | 35 | 35 |
| Total rating (btu/hr - gross) | 170,819 | 131,399 | 131,399 |
| Inlet size | 3/4" BSP | 3/4" BSP | 3/4" BSP |
| Flow rate | 4.47m³/hr | 2.545kg/h | 2.503kg/h |
| Inlet pressure (mbar) | 20 | 37 | 29 |
| Operating pressure (mbar) | 20 | 37 | 29 |
| Hob burner rating (kW - Nett) | 9.5 x 4 | 7 x 4 | 7 x 4 |
| Hob burner rating (btu/hr - gross) | 35,666 x 4 | 26,280 x 4 | 26,280 x 4 |
| Oven burner rating (kW - Nett) | 7.5 | 7 | 7 |
| Oven burner rating (btu/hr - gross) | 28,157 | 26,280 | 26,280 |
| Weight (kg) | 125 | 125 | 125 |
| Packed weight (kg) | 142 | 142 | 142 |
| Packed dimensions (mm) | 850 (w) x 970 (d) x 1105 (h) | | |

Installation Note:

Please consult local legislation with regard to installation of cooking equipment.

