

# CHIEFTAIN RANGE

## E1006



E1006 three hotplate range

### DESCRIPTION

Three hotplate electric range with large 2/1 gastronorm compatible oven.

Large hob area with individually controlled heavy duty cast iron hotplates provide flexible temperature control. Full width removable drip tray below hob.

General purpose oven with drop down door. Easily removable oven base trays, shelf hangers and 2 anti-tilt grid shelves. 4 shelf positions allow two shelf cooking.

Fitted with legs as standard, castors available as optional extra.

### FEATURES and BENEFITS

- Individually controlled heavy duty cast iron hotplates
  - Flexible temperature control, large level cooking area
- Two removable drip trays
  - Deal with hob spillages quickly and hygienically
- All stainless steel exterior panel construction
  - Superior durability, easy to clean
- Large oven with anti-tilt shelves
  - 2/1 gastronorm compatible
- Removable oven base trays and shelf hangers
  - Makes cleaning easier and quicker

### VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air and to allow easy removal of any products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172.

For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning.

### OPTIONAL ACCESSORIES

- Pot rack (900mm wide)
- Pot rack (1800mm wide)
- Oven shelf
- Factory fitted castors

### SITING

Install range on a level, fireproof surface in a well lit position. Units are best situated below a ventilating canopy to remove cooking vapours etc.

Installation must be made in accordance with local and / or national regulations applying at the time.

A competent installer must be employed.

If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance rear and any combustible wall.






# CHIEFTAIN RANGE

E1006

## MODEL DIMENSIONS (in mm)

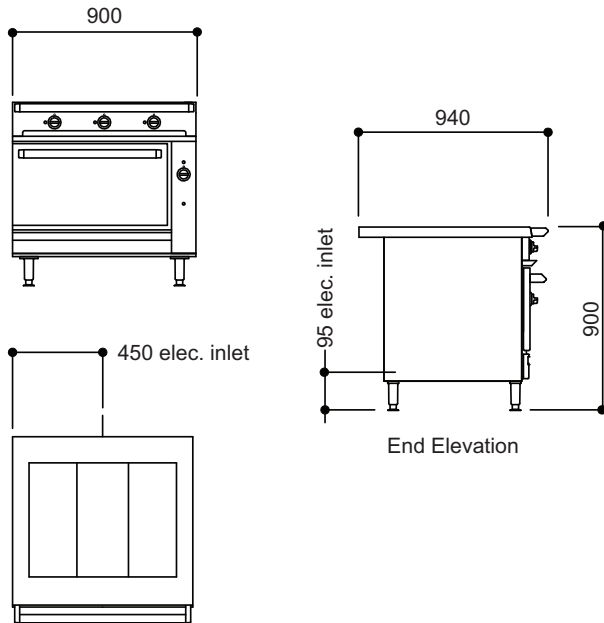

## SPECIFICATION DETAILS

### **E1006**

Oven capacity (w x d x h - mm)	620 x 530 x 350
Oven shelf (w x d - mm)	655 x 530
Oven rating (kW)	5.3
Individual hotplate rating (kW)	3.35 x 3
Total rating (kW)	15.35
Electrical supply voltage	400V 3N~ or 230 - 240V~
Electrical current split (amps)	L1:28.5, L2:14, L3:22.5
Weight (kg)	227
Packed weight (kg)	235
Height on castors (mm)	920